



# PRODUCT CATALOG

TAPE DIVISION NORTH AMERICA

# ABOUT US

**VIBAC Group is a multinational enterprise and one of the world's leading companies in the Pressure Sensitive Self Adhesive Tapes and specialty Packaging Films industry.**

## **MISSION**

Achieving sustainable and durable growth through the application of our cutting-edge manufacturing technologies.

Building a culture that gives Customer Satisfaction the highest consideration and priority.

Support a sustainable corporate growth in line with the strictest environmental regulations.

## **MARKETS**

**WE ARE CONTRIBUTING TO THE GROWTH OF DIFFERENT INDUSTRIES:**

- Packaging and Labeling
- Transportation and Logistics
- E-commerce and Business Services
- Building and Automotive
- Professional Painting and DIY

**WE ARE SERVING DIFFERENT CHANNELS:**

- Converters / Printers
- Wholesalers / Distributors
- Professional Dealers
- Industrial Enterprises
- Large-Scale Retail Trade

**WE ARE CERTIFIED**

**ISO 9001 : 2015**

**ISO 14001 : 2015**



# INDEX



<b>P.5</b>	<b>CARTON SEALING TAPES</b>	
	<b>HOT MELT</b>	
	STANDARD CARTON SEALING .....	6 - 9
	SURFACE PRINTABLE .....	10 - 11
	LABEL PROTECTION .....	12
	CUSTOM SURFACE PRINTED .....	12 - 13
	CUSTOM LOCK PRINT .....	14 - 15
	<b>NATURAL RUBBER</b>	
	STANDARD CARTON SEALING .....	16 - 18
	PVC .....	18 - 19
	BONUS TAPE .....	19
	<b>ACRYLIC</b>	
	STANDARD CARTON SEALING .....	20 - 23
<b>P.24</b>	<b>GENERAL PURPOSE MASKING TAPES</b> .....	25 - 28
<b>P.29</b>	<b>HIGH PERFORMANCE AUTOMOTIVE MASKING TAPES</b>	
	MASKING TAPE.....	30
	FINE LINE AND TRIM MASKING TAPE.....	31
<b>P.32</b>	<b>HIGH PERFORMANCE PAINTER'S MASKING TAPES</b>	
	THE DA VINCI LINE .....	33 - 34
<b>P.35</b>	<b>INDUSTRIAL AND SPECIALTY TAPES</b>	
	FILAMENT TAPE .....	36
	DUCT TAPE.....	37
	FREEZER TAPE.....	38
	STRAPPING TAPE .....	39
	DOUBLE-SIDED TAPE .....	40
<b>P.41</b>	<b>PACKAGING, PERSONALIZATION AND DISPENSERS</b> .....	41
	<b>CONTACT</b> .....	Back Cover



# CARTON SEALING TAPES

Self-adhesive tape for carton sealing, bundling, splicing and other packaging applications.



Made for **MANUAL, DISPENSER** or **AUTOMATIC SEALING**, these carton sealing tapes offer **INSTANT ADHESION** even to **IRREGULAR SURFACES**. Whether you choose **NATURAL RUBBER, HOT MELT** or **ACRYLIC**, you can always count on **HIGH CONFORMABILITY** tapes with **GREAT MECHANICAL STRENGTH** that are **COMPATIBLE** with **MOISTURE** after application and **RESISTANT** to **CHANGES IN TEMPERATURE**.



425 / 426



## UTILITY GRADE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input checked="" type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	0.96 / 0.024
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.54 / 0.040
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	44 / 48
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385



4250 / 4260



<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m, 132m, 150m, 200m
<b>Available Lengths (machine):</b>	914m, 1371m, 1828m

This Utility Grade packaging tape is primarily used for carton sealing, splicing, bundling, and other lightweight packaging applications. This product has a conformable film backing coupled with a consistent pressure sensitive hot melt adhesive coating.



500 / 501 / 502



## GENERAL PURPOSE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input checked="" type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	0.96 / 0.024
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.61 / 0.041 Clear & Tan   1.67 / 0.042 White
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	46 / 49 Clear & Tan   44 / 48 White
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385




5000 / 5001 / 5002



<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	36mm, 48mm, 72mm, 96mm, 144mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m, 132m, 150m, 200m
<b>Available Lengths (machine):</b>	914m, 1371m, 1828m

This General Purpose packaging tape is for carton sealing, splicing, bundling, and other lightweight to medium weight packaging applications. This product has a conformable film backing coupled with a consistent pressure sensitive hot melt adhesive coating.



504 / 506 / 507 / 508 / 509



5004 / 5006 / 5007 / 5008 / 5009



## GENERAL PURPOSE

<b>Color:</b>	
<b>Backing (mils/mm):</b> BOPP	0.96 / 0.024
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.59 / 0.040
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	38 / 42
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m

This General Purpose packaging tape is for carton sealing, splicing, bundling, and other lightweight to medium weight packaging applications. Convenient for color coded applications and for easy identification purposes.

520



5200



## COLD TEMPERATURE

<b>Color:</b>	Clear
<b>Backing (mils/mm):</b> BOPP	0.96 / 0.024
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.61 / 0.041
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	26 / 29
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	-7°F (-22°C) / 100°F (38°C)
<b>Application Temperature - Min / Max:</b>	25°F (-4°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	100m
<b>Available Lengths (machine):</b>	914m, 1371m

These cold temperature packaging tapes have been formulated to be used in applications at refrigerated temperatures or at room temperature and then stored in low temperature environments which include produce packaging, dairy facilities, meat and poultry processing plants. Perform very well in cold weather moving /storage conditions and unheated warehouses located in cold weather climates.

620



6200



## COLD TEMPERATURE

<b>Color:</b>	Clear
<b>Backing (mils/mm):</b> BOPP	1.16 / 0.029
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.85 / 0.047
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	27 / 29
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	-15°F (-26°C) / 100°F (38°C)
<b>Application Temperature - Min / Max:</b>	20°F (-7°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	100m
<b>Available Lengths (machine):</b>	914m, 1371m



630 / 631 / 632



## INDUSTRIAL GRADE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.16 / 0.029
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.83 / 0.046
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	47 / 51
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455



6300 / 6301 / 6302



<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	36mm, 48mm, 72mm, 96mm, 144mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m, 132m, 150m
<b>Available Lengths (machine):</b>	914m, 1371m, 1500m, 1828m

This Industrial Grade packaging tape is primarily used for carton sealing, splicing, bundling, and other medium to heavy packaging applications. This product has a conformable film backing coupled with a consistent pressure sensitive hot melt adhesive coating.



680 / 682



## SUPER TACK

<b>Color:</b>	Clear <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.16 / 0.029
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.87 / 0.0475
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	57.8 / 63
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455

6800 / 6802



<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	100m
<b>Available Lengths (machine):</b>	914m

This Super Tack packaging tape is specifically designed for boxes made of recycled fibers. This product has a conformable film backing coupled with a consistent pressure sensitive hot melt adhesive coating.



690 / 691



6900 / 6901



## PREMIUM GRADE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.16 / 0.029
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.03 / 0.051
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	56 / 60
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455

This Premium Grade packaging tape was designed for carton sealing, splicing, bundling, and other heavy packaging applications. This product offers high adhesive power, ideal for shipping purposes and heavy handling.

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	100m
<b>Available Lengths (machine):</b>	914m, 1371m

730 / 731



7300 / 7301



## HIGH PERFORMANCE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.57 / 0.040
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.44 / 0.062
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	56 / 60
<b>Tensile Strength (lbs/in. - N/100mm):</b>	36 / 630

This High Performance packaging tape was designed for carton sealing, splicing, bundling, and other extra heavy packaging applications. This product offers superior adhesive power for bulky and heavy boxes.

<b>Elongation at Break:</b>	200%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	36mm, 48mm, 72mm, 96mm, 144mm
<b>Available Lengths (hand):</b>	50m, 55m, 100m
<b>Available Lengths (machine):</b>	914m

830 / 831



8300 / 8301



## SUPERIOR PERFORMANCE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.97 / 0.050
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.83 / 0.072
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	56 / 60
<b>Tensile Strength (lbs/in. - N/100mm):</b>	45 / 787

This Superior Performance packaging tape was designed for carton sealing, splicing, bundling, and other ultra demanding packaging applications. It offers super strength adhesive power in the heaviest applications.

<b>Elongation at Break:</b>	200%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	36mm, 48mm, 72mm, 96mm, 144mm
<b>Available Lengths (hand):</b>	50m, 55m, 100m
<b>Available Lengths (machine):</b>	914m

890 / 891



8900 / 8901



## ULTRA SUPERIOR PERFORMANCE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	2.36 / 0.060
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	3.46 / 0.088
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	57 / 61
<b>Tensile Strength (lbs/in. - N/100mm):</b>	50 / 875

This Ultra Superior Performance packaging tape was designed for carton sealing, splicing, bundling, and for all extreme packaging and sealing applications. It offers aggressive adhesive power in the toughest conditions.

<b>Elongation at Break:</b>	220%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm, 144mm
<b>Available Lengths (hand):</b>	50m, 55m, 100m
<b>Available Lengths (machine):</b>	914m

6401 / 6402



Super Tan® and Super White® are extra opaque and Easy Printable packaging tapes for carton sealing, splicing, bundling, and other lightweight to medium weight packaging applications.



## SUPER TAN® / SUPER WHITE®

Color:	Tan <input checked="" type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.16 / 0.029
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	1.83 / 0.047
Adhesion to Steel (oz/in. - N/100mm):	48 / 52
Tensile Strength (lbs/in. - N/100mm):	26 / 455

Elongation at Break:	165%
Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	54°F (12°C) / 110°F (43°C)
Available Widths:	144mm, 150mm
Available Lengths (machine):	914m, 1828m

6500 / 6501 / 6502



## INDUSTRIAL GRADE

Color:	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.16 / 0.029
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	1.83 / 0.046
Adhesion to Steel (oz/in. - N/100mm):	48 / 52
Tensile Strength (lbs/in. - N/100mm):	26 / 455

Elongation at Break:	165%
Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	54°F (12°C) / 110°F (43°C)
Available Widths:	144mm, 150mm
Available Lengths (machine):	914m, 1500m, 1828m

6600 / 6602



## COLD TEMPERATURE

Color:	Clear <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.38 / 0.035
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	2.01 / 0.051
Adhesion to Steel (oz/in. - N/100mm):	27 / 29
Tensile Strength (lbs/in. - N/100mm):	31 / 542

Elongation at Break:	165%
Service Temperature - Min / Max:	-15°F (-26°C) / 100°F (38°C)
Application Temperature - Min / Max:	20°F (7°C) / 110°F (43°C)
Available Widths:	144mm, 150mm
Available Lengths (machine):	914m

6700 / 6701 / 6702



## HIGH PERFORMANCE

Color:	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.38 / 0.035
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	2.01 / 0.051
Adhesion to Steel (oz/in. - N/100mm):	43 / 46
Tensile Strength (lbs/in. - N/100mm):	31 / 542

Elongation at Break:	165%
Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	54°F (12°C) / 110°F (43°C)
Available Widths:	144mm, 150mm, 288mm, 300mm
Available Lengths (machine):	914m, 828m

**6880 / 6882**

This easy printable Super Tack packaging tape is specifically designed for boxes made of recycled fibers. This product has a conformable film backing coupled with a consistent pressure sensitive hot melt adhesive coating.

## SUPER TACK

<b>Color:</b>	Clear <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.16 / 0.029
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.87 / 0.0475
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	57.8 / 63
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	50°F (10°C) / 110°F (43°C)
<b>Available Widths:</b>	144mm, 150mm
<b>Available Lengths (machine):</b>	914m, 1828m

This Easy Printable Superior Performance packaging tape is specifically designed for automatic carton sealing applications that require super strength adhesion for demanding packaging applications.

**7500 / 7501 / 7502**

## SUPERIOR PERFORMANCE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.57 / 0.04
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.44 / 0.062
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	57 / 61
<b>Tensile Strength (lbs/in. - N/100mm):</b>	36 / 630



<b>Elongation at Break:</b>	200%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	144mm, 150mm, 288mm, 300mm
<b>Available Lengths (machine):</b>	914m, 1828m

**8500 / 8501 / 8502**

## ULTRA SUPERIOR PERFORMANCE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.97 / 0.05
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.83 / 0.072
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	57 / 61
<b>Tensile Strength (lbs/in. - N/100mm):</b>	45 / 787

<b>Elongation at Break:</b>	200%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	144mm, 150mm, 288mm, 300mm
<b>Available Lengths (machine):</b>	914m



This Label Protection Tape has been specifically designed to protect labels against abrasion due to rough handling. It is also moisture resistant, ensuring any printed matter will remain legible, even if exposed to damp conditions.

5100



## LABEL PROTECTION

Color:	Clear <input type="checkbox"/>
Backing (mils/mm): BOPP	0.96 / 0.024
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	1.54 / 0.039
Adhesion to Steel (oz/in. - N/100mm):	44 / 48
Tensile Strength (lbs/in. - N/100mm):	22 / 385



Elongation at Break:	165%
Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	54°F (12°C) / 110°F (43°C)
Available Widths:	72mm, 96mm, 144mm
Available Lengths:	66m, 100m, 132m

## AVAILABLE COLORS FOR SURFACE PRINTED AND CUSTOM LOCK PRINT CARTON SEALING TAPE



6510 / 6511 / 6512

Printed  
1 color

6520 / 6521 / 6522

Printed  
2 colors

## INDUSTRIAL GRADE

Color:	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.16 / 0.029
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	1.83 / 0.046
Adhesion to Steel (oz/in. - N/100mm):	48 / 52
Tensile Strength (lbs/in. - N/100mm):	26 / 455
Elongation at Break:	165%

Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	54°F (12°C) / 110°F (43°C)
Available Widths:	36mm, 48mm, 72mm, 96mm, 144mm
Available Lengths (hand):	50m, 66m, 100m, 132m
Available Lengths (machine):	914m



This Industrial Grade packaging tape is primarily used for carton sealing, splicing, bundling, and other medium to heavy packaging. It offers strong adhesion and is printable in one or two colors which is ideal for advertising, branding or stopping pilferage and forgery.

6610 / 6612

Printed  
1 color

6620 / 6622

Printed  
2 colors

## COLD TEMPERATURE

<b>Color:</b>	Clear <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.38 / 0.035
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.01 / 0.051
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	27 / 29
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	-15°F (-26°C) / 100°F (38°C)
<b>Application Temperature - Min / Max:</b>	20°F (-7°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (machine):</b>	914m

This Industrial Grade packaging tape is primarily used for carton sealing, splicing, bundling, and other medium to heavy packaging. It offers medium to heavy adhesion in low temperature environments such as meat processing plants. It is printable in one or two colors which is ideal for advertising, branding or stopping pilferage and forgery.

7510 / 7511 / 7512

Printed  
1 color

7520 / 7521 / 7522

Printed  
2 colors

## HIGH PERFORMANCE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.57 / 0.04
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.44 / 0.062
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	56 / 60
<b>Tensile Strength (lbs/in. - N/100mm):</b>	36 / 630

This High Performance packaging tape is primarily used for carton sealing, splicing, bundling, and other extra heavy packaging applications. It offers a superior adhesive power for bulky and heavy boxes and is printable in one or two colors which is ideal for advertising, branding or stopping pilferage and forgery.

<b>Elongation at Break:</b>	200%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	36mm, 48mm, 72mm, 144mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m, 132m
<b>Available Lengths (machine):</b>	914m

8310 / 8311 / 8312

Printed  
1 color

8320 / 8321 / 8322

Printed  
2 colors

## SUPERIOR PERFORMANCE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.97 / 0.050
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	2.83 / 0.072
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	57 / 61
<b>Tensile Strength (lbs/in. - N/100mm):</b>	45 / 787

This Superior Performance packaging tape is primarily used for carton sealing, splicing, bundling, and other ultra demanding packaging applications. It offers super strength adhesion in the heaviest conditions and is printable in one or two colors which is ideal for advertising, branding or stopping pilferage and forgery.

<b>Elongation at Break:</b>	200%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	36mm, 48mm, 72mm, 96mm, 144mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m, 132m
<b>Available Lengths (machine):</b>	914m

6210 / 6212	Printed 1 color
6220 / 6222	Printed 2 colors
6230 / 6232	Printed 3 colors
6240 / 6242	Printed 4 colors



## COLD TEMPERATURE

<b>Color:</b>	Clear <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.16 / 0.029
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.85 / 0.047
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	27 / 29
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455

This cold temperature packaging tape has been formulated to be used in applications at refrigerated temperatures or at room temperature and then stored in low temperature environments which include produce packaging, dairy facilities, meat and poultry processing plants. Its custom lock print feature is ideal for company logos or identification meant to be permanently displayed. Printable in one or two colors. Ideal for advertising, branding or stopping pilferage and forgery.

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	-15°F (-26°C) / 100°F (38°C)
<b>Application Temperature - Min / Max:</b>	20°F (-7°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	100m
<b>Available Lengths (machine):</b>	914m, 1371m

8510 / 8511 / 8512	Printed 1 color
8520 / 8521 / 8522	Printed 2 colors
8530 / 8531 / 8532	Printed 3 colors
8540 / 8541 / 8542	Printed 4 colors



## GENERAL PURPOSE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	0.96 / 0.024
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.61 / 0.041
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	46 / 49
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385

This General Purpose packaging tape is primarily used for carton sealing, splicing, bundling, and other lightweight to medium packaging applications. Its custom lock print feature is ideal for company logos or identification meant to be permanently displayed. Printable in one or two colors. Ideal for advertising, branding or stopping pilferage and forgery.

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm, 44mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m, 132m, 150m, 200mm
<b>Available Lengths (machine):</b>	914m

8610 / 8611 / 8612	Printed 1 color
8620 / 8621 / 8622	Printed 2 colors
8630 / 8631 / 8632	Printed 3 colors
8640 / 8641 / 8642	Printed 4 colors



## INDUSTRIAL GRADE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.16 / 0.029
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	1.83 / 0.046
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	47 / 51
<b>Tensile Strength (lbs/in. - N/100mm):</b>	26 / 455

This Industrial Grade packaging tape is primarily used for carton sealing, splicing, bundling, and other medium to heavy packaging applications. Its custom lock print feature is ideal for company logos or identification meant to be permanently displayed. Printable in one or two colors. Ideal for advertising, branding or stopping pilferage and forgery.

<b>Elongation at Break:</b>	165%
<b>Service Temperature - Min / Max:</b>	30°F (-2°C) / 140°F (60°C)
<b>Application Temperature - Min / Max:</b>	54°F (12°C) / 110°F (43°C)
<b>Available Widths:</b>	48mm, 72mm, 144mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m, 132m, 150m, 200m
<b>Available Lengths (machine):</b>	914m

8710 / 8711 / 8712	Printed 1 color
8720 / 8721 / 8722	Printed 2 colors
8730 / 8731 / 8732	Printed 3 colors
8740 / 8741 / 8742	Printed 4 colors



## HIGH PERFORMANCE

Color:	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.57 / 0.040
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	2.44 / 0.062
Adhesion to Steel (oz/in. - N/100mm):	56 / 60
Tensile Strength (lbs/in. - N/100mm):	36 / 630

Elongation at Break:	200%
Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	54°F (12°C) / 110°F (43°C)
Available Widths:	48mm, 72mm, 144mm
Available Lengths (hand):	50m, 55m, 100m
Available Lengths (machine):	914m,

8810 / 8811 / 8812	Printed 1 color
8820 / 8821 / 8822	Printed 2 colors
8830 / 8831 / 8832	Printed 3 colors
8840 / 8841 / 8842	Printed 4 colors



## SUPERIOR PERFORMANCE

Color:	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.97 / 0.050
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	2.83 / 0.075
Adhesion to Steel (oz/in. - N/100mm):	56 / 61
Tensile Strength (lbs/in. - N/100mm):	45 / 787

This Superior Performance packaging tape is primarily used for carton sealing, splicing, bundling, and offers super strength adhesive power in the heaviest conditions. Its custom lock print feature is ideal for company logos or identification meant to be permanently displayed. Printable in one or two colors. Ideal for advertising, branding or stopping pilferage and forgery.

Elongation at Break:	200%
Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	54°F (12°C) / 110°F (43°C)
Available Widths:	48mm, 72mm, 144mm
Available Lengths (hand):	50m, 55m, 100m
Available Lengths (machine):	914m,

8910 / 8911 / 8912	Printed 1 color
8920 / 8921 / 8922	Printed 2 colors
8930 / 8931 / 8932	Printed 3 colors
8940 / 8941 / 8942	Printed 4 colors



## ULTRA SUPERIOR PERFORMANCE

Color:	Clear <input type="checkbox"/> Tan <input type="checkbox"/>
Backing (mils/mm): BOPP	2.36 / 0.060
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	3.46 / 0.088
Adhesion to Steel (oz/in. - N/100mm):	57 / 61
Tensile Strength (lbs/in. - N/100mm):	50 / 875

This Ultra Superior Performance packaging tape was designed for carton sealing, splicing, bundling, and for all extreme packaging and sealing applications. It offers aggressive adhesive power in the toughest conditions.

Elongation at Break:	220%
Service Temperature - Min / Max:	30°F (-2°C) / 140°F (60°C)
Application Temperature - Min / Max:	50°F (10°C) / 110°F (43°C)
Available Widths:	48mm, 72mm, 96mm, 144mm
Available Lengths (hand):	50m, 55m, 100m
Available Lengths (machine):	914m



250 / 251 / 252



2500 / 2501 / 2502



This General Purpose natural rubber adhesive based carton sealing tape is primarily used for carton sealing, splicing, bundling and other lightweight packaging applications.

**GENERAL PURPOSE**

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	0.98 / 0.025
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	1.57 / 0.040
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 394

<b>Elongation at Break:</b>	140%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m



270 / 271 / 272

2700 / 2701 / 2702

**HEAVY GRADE**

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.97 / 0.050
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	2.76 / 0.070
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	27 / 29
<b>Tensile Strength (lbs/in. - N/100mm):</b>	39 / 686

This Heavy Grade natural rubber adhesive based carton sealing tape is primarily used for carton sealing, splicing, bundling and other medium to heavy packaging applications.

<b>Elongation at Break:</b>	160%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m

280 / 281 / 282



2800 / 2801 / 2802



This Industrial Grade natural rubber adhesive based carton sealing tape is primarily used for carton sealing, splicing, bundling and other medium to heavy packaging applications.

**INDUSTRIAL GRADE**

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.10 / 0.028
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	1.77 / 0.045
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	25 / 28
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 394

<b>Elongation at Break:</b>	140%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m





290

2900

**PREMIUM GRADE**

<b>Color:</b>	Clear <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.2 / 0.03
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	1.83 / 0.046
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24
<b>Tensile Strength (lbs/in. - N/100mm):</b>	27 / 394



This Premium Grade natural rubber adhesive based carton sealing tape is primarily used for carton sealing, splicing, bundling and other lightweight packaging applications.

<b>Elongation at Break:</b>	140%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m



290 SLT

**PREMIUM GRADE**

<b>Color:</b>	Clear <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.2 / 0.03
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	2.2 / 0.055
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24
<b>Tensile Strength (lbs/in. - N/100mm):</b>	27 / 394

This Premium Grade natural rubber adhesive based carton sealing tape is primarily used for carton sealing, splicing, bundling and other lightweight packaging applications.

<b>Elongation at Break:</b>	140%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m

**FUN FACT:**

IN 2014, A 1962 FERRARI 250 GTO WAS SOLD FOR

USD **\$38,098,927**



600 / 601 / 602



6000 / 6001 / 6002



This High Performance natural rubber adhesive based carton sealing tape is primarily used for carton sealing, splicing, bundling and heavy packaging applications.

**HIGH PERFORMANCE**

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.4 / 0.035
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	2.16 / 0.055
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	32 / 35
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 394

<b>Elongation at Break:</b>	180%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m

600 SLT



This High Performance natural rubber adhesive based carton sealing tape is primarily used for carton sealing, splicing, bundling and other medium to heavy packaging applications.

**HIGH PERFORMANCE**

<b>Color:</b>	Clear <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.4 / 0.035
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	2.4 / 0.060
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	25 / 28
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 394

<b>Elongation at Break:</b>	180%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 100m



This carton sealing tape features a PVC (Polyvinyl Chloride) film backing and a natural rubber and resin based adhesive. This pressure sensitive tape provides instant adhesion, possesses excellent quick stick properties and sticks to a wide variety of irregularly shaped surfaces. It has been specifically formulated to provide great instant adhesion to fiberboard, plastic, glass, metallic, printed and painted surfaces. Excellent for recycled carton sealing in cold temperature environments.

700 / 701 / 702



7000 / 7001 / 7002



**PVC TAPE**

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> PVC	1.3 / 0.033
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	2.1 / 0.052
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	18 / 20
<b>Tensile Strength (lbs/in. - N/100mm):</b>	25 / 447
<b>Elongation at Break:</b>	80%

<b>Service Temperature - Min / Max:</b>	20°F (-7°C) / 140°F (60°C)
<b>Available Widths (hand):</b>	48mm, 72mm
<b>Available Lengths (hand):</b>	50m, 66m, 100m
<b>Available Widths (machine):</b>	144mm, 150mm
<b>Available Lengths (machine):</b>	990m



This hand tearable carton sealing tape features a PVC (Polyvinyl Chloride) film backing and a natural rubber and resin based adhesive. This pressure sensitive tape provides instant adhesion, possesses excellent quick stick properties and sticks to a wide variety of irregularly shaped surfaces. It has been specifically formulated to provide great instant adhesion to fiberboard, plastic, glass, metallic, printed and painted surfaces. Offered in a wide variety of colors for easy identification or color coded systems.



703 / 704 / 705 / 706 / 707 / 708 / 709



### COLOR PVC TAPE

<b>Color:</b>	
<b>Backing (mils/mm):</b> PVC	1.5 / 0.037
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	2.3 / 0.058
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	18 / 20
<b>Tensile Strength (lbs/in. - N/100mm):</b>	30 / 533

<b>Elongation at Break:</b>	80%
<b>Service Temperature - Min / Max:</b>	20°F (-7°C) / 140°F (60°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths:</b>	50m, 66m, 100m



### BONUS TAPE 1

Bonus Tape is a patented adhesive tape that uses less space compared to most other packaging tapes. The new 200m (220 yards) roll on a cardboard core with a smaller diameter of 1.5" reduces the space necessary to store the tape by 2/3. It also reduces the amount of packaging materials necessary for packing the tape by at least 65% which would normally be discarded into the environment.



<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1 / 0.025
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	1.61 / 0.041
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24

<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385
<b>Elongation at Break:</b>	140%
<b>Available Widths:</b>	48mm
<b>Available Lengths (hand):</b>	200m



### BONUS TAPE

<b>Color:</b>	Clear <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.1 / 0.028
<b>Adhesive:</b>	Natural Rubber and Resin Based
<b>Total Thickness (mils/mm):</b>	1.8 / 0.045
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24



<b>Tensile Strength (lbs/in. - N/100mm):</b>	25 / 436
<b>Elongation at Break:</b>	140%
<b>Available Widths:</b>	48mm
<b>Available Lengths (hand):</b>	200m



123



General Purpose acrylic packaging tape for carton sealing, splicing, bundling, and other lightweight packaging applications requiring standard adhesion strength.



**GENERAL PURPOSE**

<b>Color:</b>	Clear Ice <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	0.91 / 0.023
<b>Adhesive:</b>	Acrylic
<b>Total Thickness (mils/mm):</b>	1.54 / 0.039
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	20.5 / 22.3

<b>Tensile Strength (lbs/in. - N/100mm):</b>	16 / 291
<b>Elongation at Break:</b>	200%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 95°F (35°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths:</b>	50m, 100m

125



1250



Industrial Grade acrylic packaging tape for carton sealing, splicing, bundling, and other medium to heavy packaging applications requiring heavy adhesion strength.



**INDUSTRIAL GRADE**

<b>Color:</b>	Clear Ice <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.0 / 0.025
<b>Adhesive:</b>	Acrylic
<b>Total Thickness (mils/mm):</b>	1.7 / 0.043
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	20.5 / 22.3
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 388

<b>Elongation at Break:</b>	140%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm, 144mm
<b>Available Lengths:</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m, 1828m

128



1280



Premium Grade acrylic packaging tape for carton sealing, splicing, bundling, and other heavy packaging applications requiring high adhesion strength.



**PREMIUM GRADE**

<b>Color:</b>	Clear Ice <input type="checkbox"/> Clear Honey <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.1 / 0.028
<b>Adhesive:</b>	Acrylic
<b>Total Thickness (mils/mm):</b>	1.9 / 0.048
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	20.5 / 22.3
<b>Tensile Strength (lbs/in. - N/100mm):</b>	25 / 436

<b>Elongation at Break:</b>	140%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths:</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m, 1828m



128 HT

Available in



PREMIUM GRADE

Color:	Clear Ice <input type="checkbox"/> Clear Honey <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.1 / 0.028
Adhesive:	Acrylic
Total Thickness (mils/mm):	2.1 / 0.053
Adhesion to Steel (oz/in. - N/100mm):	24 / 26

High Performance acrylic packaging tape for carton sealing, splicing, bundling, and other extra heavy packaging applications requiring superior adhesion strength.



Tensile Strength (lbs/in. - N/100mm):	25 / 436
Elongation at Break:	150%
Application Temperature - Min / Max:	32°F (0°C) / 122°F (50°C)
Available Widths:	48mm, 72mm
Available Lengths:	50m, 100m

Short rolls available in

132



1320



HIGH PERFORMANCE

Color:	Clear Ice <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.3 / 0.032
Adhesive:	Acrylic
Total Thickness (mils/mm):	2.1 / 0.052
Adhesion to Steel (oz/in. - N/100mm):	20 / 22
Tensile Strength (lbs/in. - N/100mm):	30 / 495

Premium Grade acrylic packaging tape for heavy packaging applications. This High Tack version provides extra high adhesion.



Elongation at Break:	160%
Application Temperature - Min / Max:	32°F (0°C) / 122°F (50°C)
Available Widths:	48mm, 72mm
Available Lengths:	50m, 100m
Available Lengths (machine):	914m, 1828m

Available in

132 HT



HIGH PERFORMANCE

Color:	Clear Ice <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.3 / 0.032
Adhesive:	Acrylic
Total Thickness (mils/mm):	2.3 / 0.058
Adhesion to Steel (oz/in. - N/100mm):	27 / 29

High Performance acrylic packaging tape for extra heavy packaging applications. This High Tack version provides extreme adhesion strength for the most demanding jobs. Ideal for use with recycled cardboard boxes.



Tensile Strength (lbs/in. - N/100mm):	28 / 485
Elongation at Break:	150%
Application Temperature - Min / Max:	32°F (0°C) / 122°F (50°C)
Available Widths:	48mm, 72mm
Available Lengths:	50m, 100m

Short rolls available in **135** Reverse printing **1350** Automatic Sealing

Premium Grade acrylic packaging tape for carton sealing, splicing, bundling, and other heavy packaging applications requiring high adhesion strength.



**PREMIUM GRADE**

<b>Color:</b>	Clear Ice <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.38 / 0.035
<b>Adhesive:</b>	Acrylic
<b>Total Thickness (mils/mm):</b>	2.36 / 0.06
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	24 / 26.4
<b>Tensile Strength (lbs/in. - N/100mm):</b>	28 / 492

<b>Elongation at Break:</b>	150%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths:</b>	50m, 100m
<b>Available Lengths (machine):</b>	914m, 1828m

Available in **135 HT** **HIGH TACK**  



High Performance acrylic packaging tape for extra heavy packaging applications. This High Tack version provides extreme adhesion strength for the most demanding jobs. Ideal for use with recycled cardboard boxes.



**HIGH PERFORMANCE**


<b>Color:</b>	Clear Ice <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.38 / 0.035
<b>Adhesive:</b>	Acrylic
<b>Total Thickness (mils/mm):</b>	2.56 / 0.065
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	26.8 / 29.6
<b>Tensile Strength (lbs/in. - N/100mm):</b>	30.8 / 540

<b>Elongation at Break:</b>	150%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths:</b>	50m, 100m



**REVERSE PRINTING IS AVAILABLE ON THE PREMIUM AND HIGH PERFORMANCE GRADES**



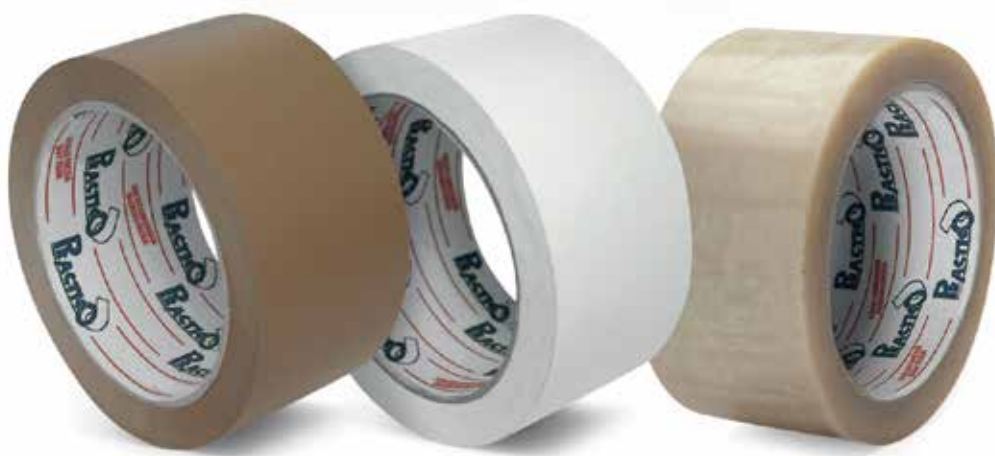

135 PRC



Available in

Reverse printing

Premium Grade acrylic packaging tape for heavy packaging applications.

- Easy tear
- Silent unwinding
- Writable
- Matt appearance, pleasant to touch



**PRACTICO**

<b>Color:</b>	Clear Ice <input type="checkbox"/> Tan <input type="checkbox"/> White <input type="checkbox"/>
<b>Backing (mils/mm):</b> BOPP	1.38 / 0.035
<b>Adhesive:</b>	Acrylic
<b>Total Thickness (mils/mm):</b>	2.36 / 0.06
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	24 / 26.4
<b>Tensile Strength (lbs/in. - N/100mm):</b>	28 / 492

<b>Elongation at Break:</b>	150%
<b>Application Temperature - Min / Max:</b>	32°F (0°C) / 122°F (50°C)
<b>Available Widths:</b>	50mm, 66mm
<b>Available Lengths:</b>	100m, 132m



# GENERAL PURPOSE MASKING TAPES



Painting, Arts & Crafts,  
Automotive, Labeling,  
Bundling, Splicing & more







Utility Grade masking tape designed for non-critical applications. Excellent room temperature product (indoor use only). Solvent and thinner resistant. Ideal for everyday tasks. Ideal for marking and Light-Duty bundling, wrapping and sealing

213



**UTILITY GRADE**

<b>Color:</b>	Light yellow
<b>Backing:</b>	Saturated Semi-Crepe Paper
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	4.7 / 0.120
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24
<b>Tensile Strength (lbs/in. - N/100mm):</b>	18 / 300
<b>Elongation at Break:</b>	5%
<b>Temperature resistance:</b>	122°F (50°C) for 30 minutes
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
<b>Available Lengths:</b>	55m



Utility Grade masking tape designed for non-critical applications. Excellent room temperature product (indoor use only). Solvent and thinner resistant. Ideal for everyday tasks. Ideal for marking and Light-Duty bundling, wrapping and sealing

214



**UTILITY GRADE**

<b>Color:</b>	Ivory
<b>Backing:</b>	Saturated Semi-Crepe Paper
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	4.7 / 0.120
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24
<b>Tensile Strength (lbs/in. - N/100mm):</b>	18 / 300
<b>Elongation at Break:</b>	5%
<b>Temperature resistance:</b>	122°F (50°C) for 30 minutes
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
<b>Available Lengths:</b>	55m



Utility Grade masking tape designed for non-critical applications. Excellent room temperature product (indoor use only). Solvent and thinner resistant. Ideal for everyday tasks.

216



**UTILITY GRADE**

<b>Color:</b>	Ivory
<b>Backing:</b>	Saturated Semi-Crepe Paper
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	4.3 / 0.115
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	20.5 / 23
<b>Tensile Strength (lbs/in. - N/100mm):</b>	20 / 337
<b>Elongation at Break:</b>	5%
<b>Temperature resistance:</b>	122°F (50°C) for 30 minutes
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
<b>Available Lengths:</b>	55m



General Purpose masking tape designed for non-critical applications. Excellent room temperature product (indoor use only). Solvent and thinner resistant. Great for painting and DIY projects.

218



### GENERAL PURPOSE

Color:	Ivory
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5 / 0.125
Adhesion to Steel (oz/in. - N/100mm):	20 / 23
Tensile Strength (lbs/in. - N/100mm):	22 / 385
Elongation at Break:	9%
Temperature resistance:	122°F (50°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



General Purpose masking tape designed for non-critical applications. Excellent room temperature product (indoor use only). Solvent and thinner resistant. Great for painting and DIY projects.

219



### GENERAL PURPOSE

Color:	Light yellow
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5 / 0.125
Adhesion to Steel (oz/in. - N/100mm):	20 / 23
Tensile Strength (lbs/in. - N/100mm):	22 / 385
Elongation at Break:	9%
Temperature resistance:	122°F (50°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



General Purpose masking tape designed for non-critical applications. Excellent room temperature product (indoor use only). Solvent and thinner resistant. Great for painting and DIY projects. Ideal for marking and Light-Duty bundling, wrapping and sealing

221



### GENERAL PURPOSE

Color:	Light grey
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5,2 / 0.132
Adhesion to Steel (oz/in. - N/100mm):	22 / 24
Tensile Strength (lbs/in. - N/100mm):	20 / 344
Elongation at Break:	6,5%
Temperature resistance:	140°F (60°C) for 45 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



This masking tape has been designed for high temperatures, automotive and industrial applications. It is solvent and thinner resistant, provides instant adhesion, possesses quick stick properties to a wide variety of irregularly shaped surfaces. Compatible with solvent and water paints and leaves no adhesive transfer when removed.

224

**GENERAL PURPOSE / AUTOMOTIVE**

<b>Color:</b>	Light yellow
<b>Backing:</b>	Saturated Semi-Crepe Paper
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	5.3 / 0.135
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	24 / 26
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385
<b>Elongation at Break:</b>	9%
<b>Temperature resistance:</b>	176°F (80°C) for 30 minutes
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
<b>Available Lengths:</b>	55m



This masking tape has been designed for high temperatures, automotive and industrial applications. It is solvent and thinner resistant, provides instant adhesion, possesses excellent quick stick properties to a wide variety of irregularly shaped surfaces. Compatible with solvent and water paints and leaves no adhesive transfer when removed. Exceptional performance in automobile repair and professional body shops.

229

**GENERAL PURPOSE / AUTOMOTIVE**

<b>Color:</b>	Light yellow
<b>Backing:</b>	Saturated Semi-Crepe Paper
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	5.4 / 0.137
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	26 / 28
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22 / 385
<b>Elongation at Break:</b>	9%
<b>Temperature resistance:</b>	212°F (100°C) for 30 minutes
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
<b>Available Lengths:</b>	55m



Utility Grade masking tape designed for non-critical applications. Excellent room temperature product (indoor use only). Solvent and thinner resistant. Ideal for everyday tasks. Ideal for marking and Light-Duty bundling, wrapping and sealing

261

**GENERAL PURPOSE / AUTOMOTIVE**

<b>Color:</b>	Ivory
<b>Backing:</b>	Saturated Semi-Crepe Paper
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	5.1 / 0.13
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	25 / 28
<b>Tensile Strength (lbs/in. - N/100mm):</b>	21 / 368
<b>Elongation at Break:</b>	7%
<b>Temperature resistance:</b>	140°F (45°C) for 30 minutes
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
<b>Available Lengths:</b>	55m



This masking tape has been designed for high temperatures, automotive and industrial applications. It is solvent and thinner resistant, provides instant adhesion, possesses outstanding quick stick properties to a wide variety of irregularly shaped surfaces. Compatible with solvent and water paints and leaves no adhesive transfer on removal. Recommended for automobile repair in professional body shops.

300



### GENERAL PURPOSE / AUTOMOTIVE

Color:	Ivory
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.7 / 0.145
Adhesion to Steel (oz/in. - N/100mm):	25 / 27
Tensile Strength (lbs/in. - N/100mm):	28 / 485
Elongation at Break:	9%
Temperature resistance:	212°F (100°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



This masking tape has been designed for high temperatures, automotive and industrial applications. It is solvent and thinner resistant, provides instant adhesion, possesses outstanding quick stick properties to a wide variety of irregularly shaped surfaces. Compatible with solvent and water paints and leaves no adhesive transfer on removal. Recommended for automobile repair in professional body shops.

311




### GENERAL PURPOSE / AUTOMOTIVE

Color:	Light grey
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.4 / 0.137
Adhesion to Steel (oz/in. - N/100mm):	22 / 24
Tensile Strength (lbs/in. - N/100mm):	21 / 364
Elongation at Break:	7%
Temperature resistance:	176°F (80°C) for 30 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



# HIGH PERFORMANCE AUTOMOTIVE MASKING TAPES

FOR WATERBORNE AND SOLVENT PAINT

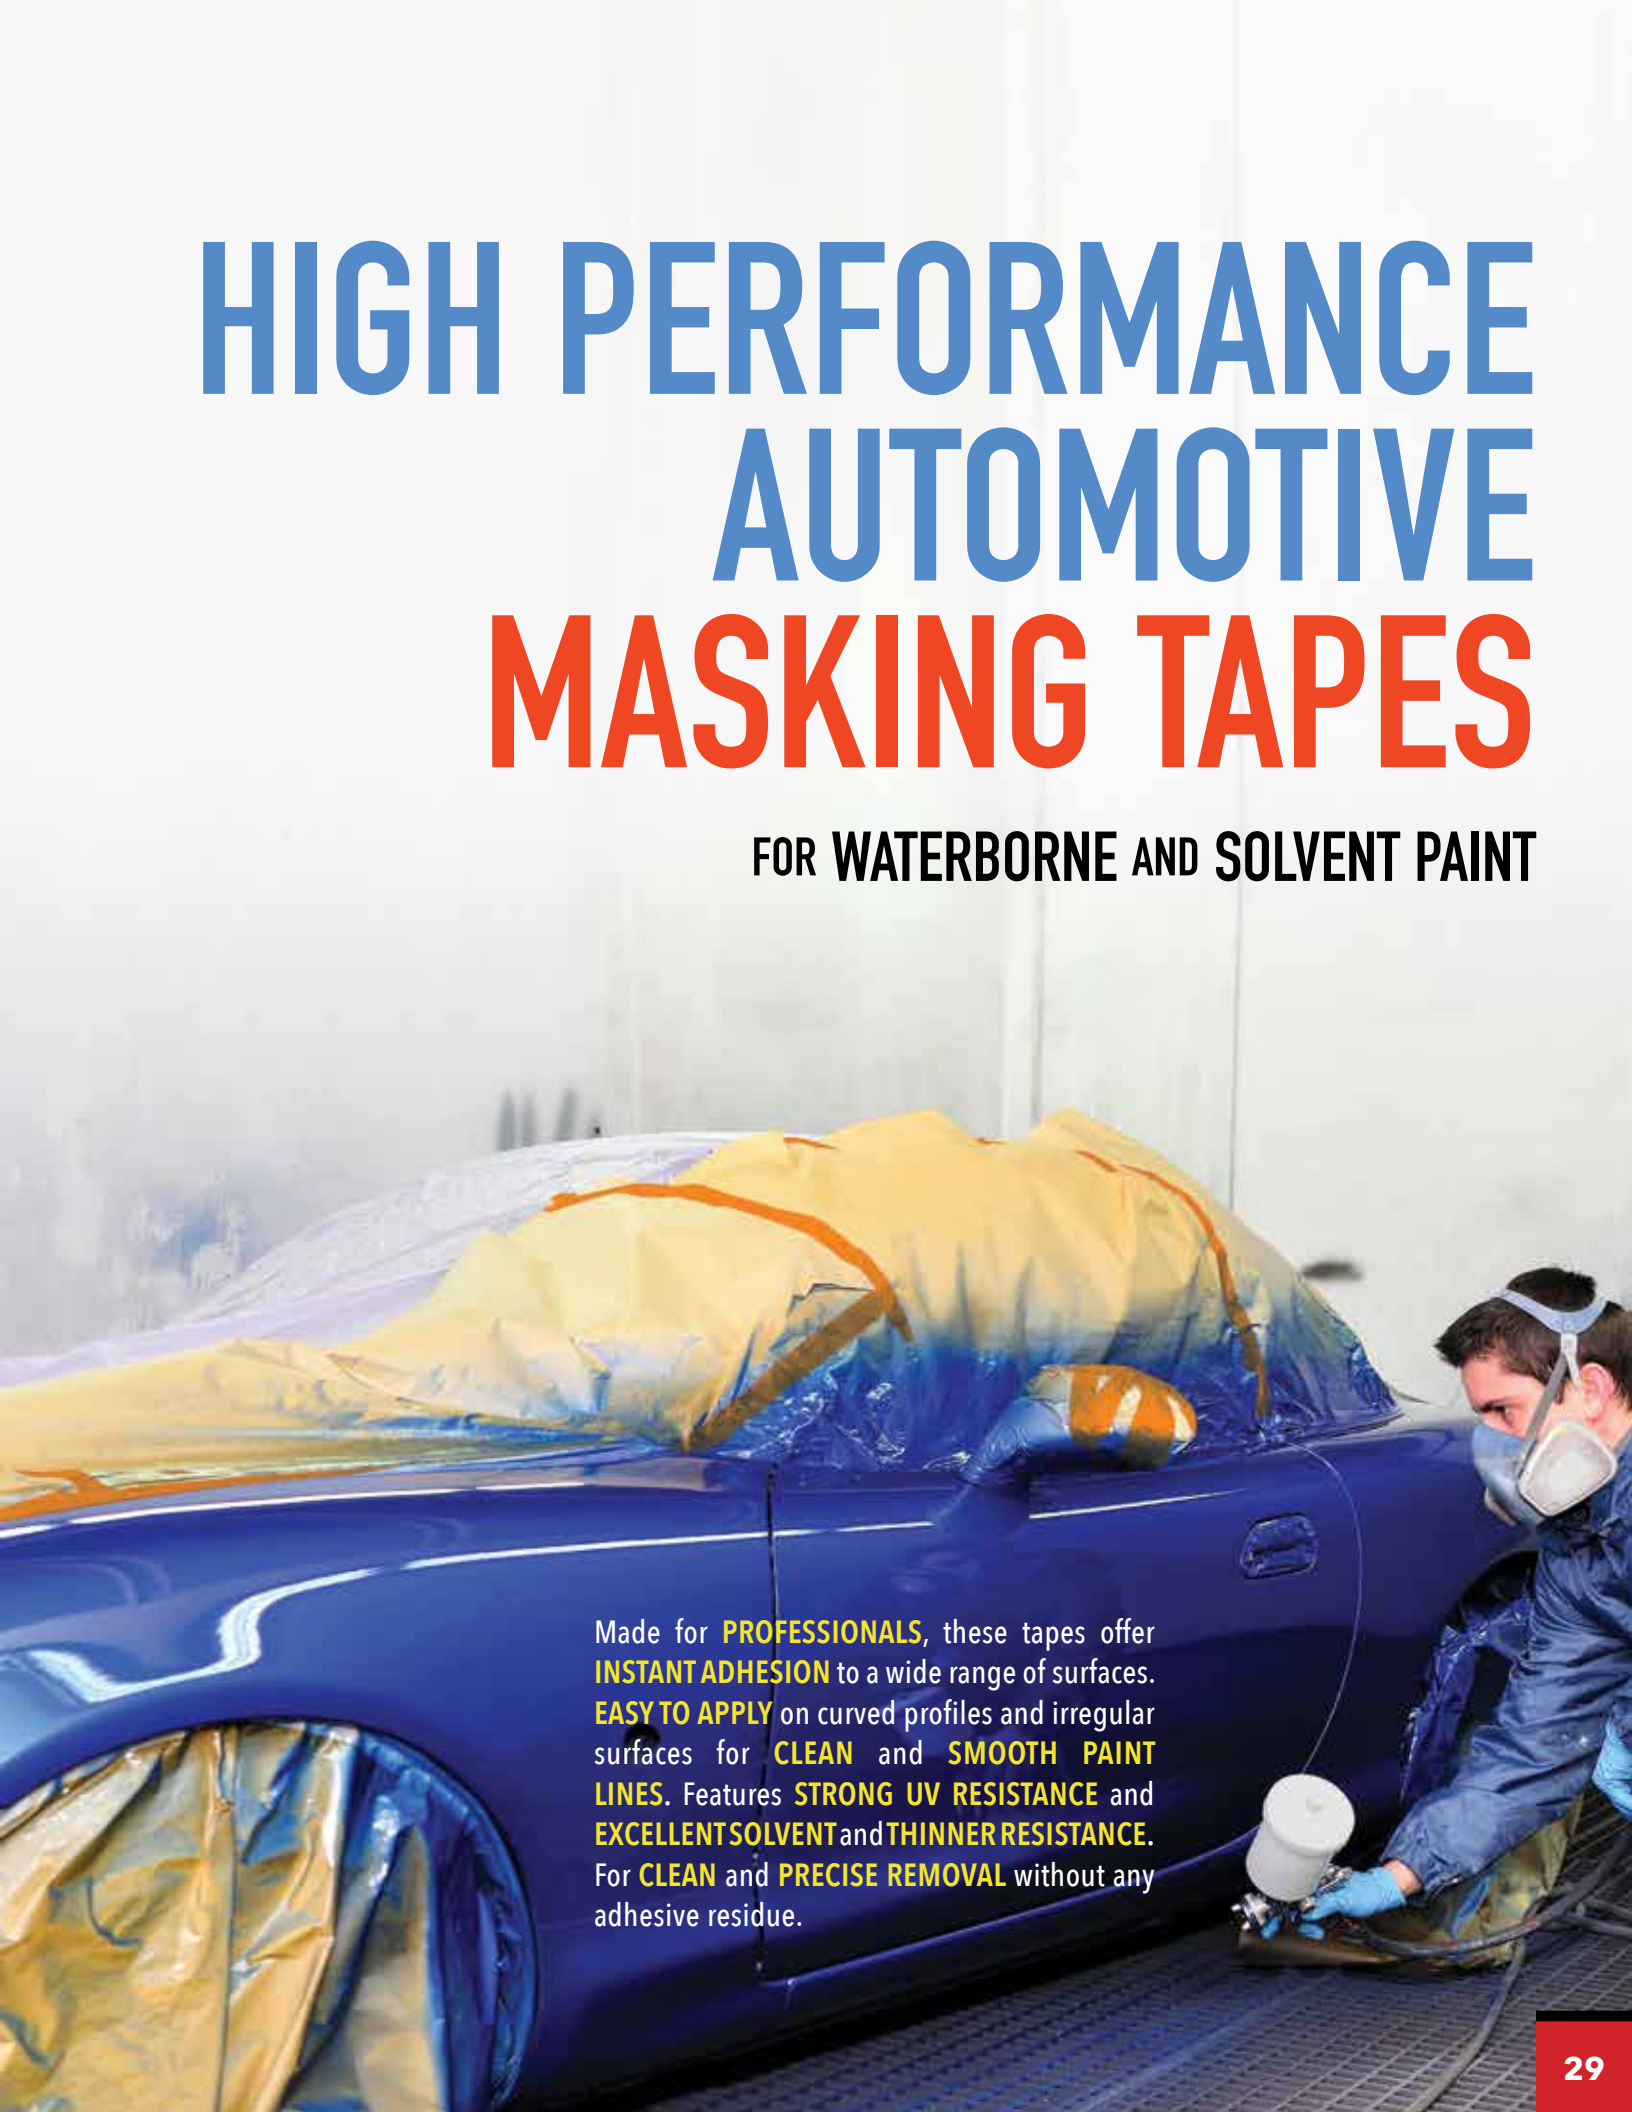

Made for **PROFESSIONALS**, these tapes offer **INSTANT ADHESION** to a wide range of surfaces. **EASY TO APPLY** on curved profiles and irregular surfaces for **CLEAN** and **SMOOTH PAINT LINES**. Features **STRONG UV RESISTANCE** and **EXCELLENT SOLVENT** and **THINNER RESISTANCE**. For **CLEAN** and **PRECISE REMOVAL** without any adhesive residue.



- UV resistant for up to 10 Days
- High temperature bake cycles: 212°F (100°C) for 30 minutes

207



**PERFORMANCE**

Color:	Orange
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.4 / 0.137
Adhesion to Steel (oz/in. - N/100mm):	26 / 28
Tensile Strength (lbs/in. - N/100mm):	22 / 385
Elongation at Break:	9%
Temperature resistance:	212°F (100°C) for 30 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



- UV resistant for up to 14 Days
- High temperature bake cycles: 230°F (110°C) for 60 minutes

313



**SUPERIOR**

Color:	Fluorescent yellow
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.7 / 0.145
Adhesion to Steel (oz/in. - N/100mm):	27 / 29
Tensile Strength (lbs/in. - N/100mm):	28 / 485
Elongation at Break:	9%
Temperature resistance:	230°F (110°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



**TO MEET THE MOST DEMANDING APPLICATIONS**

- UV resistant for up to 15 Days
- High temperature bake cycles: 250°F (121°C) for 60 minutes

316



**ULTIMATE**

Color:	Green
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.9 / 0.150
Adhesion to Steel (oz/in. - N/100mm):	29 / 37
Tensile Strength (lbs/in. - N/100mm):	28 / 485
Elongation at Break:	9%
Temperature resistance:	250°F (121°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m


## FINE LINE TAPE

- Tough and conformable
- Waterproof and solvent resistant
- Translucent for easy application and inspection
- Crisp, fineline edge
- Printable and die-cuttable
- Leaves no residue
- Stain and ghosting resistant
- Recyclable and clean - no dust or contaminants
- High temperature bake cycles



**704**    


### FINE LINE TAPE

<b>Color:</b>	Blue 
<b>Backing:</b>	PVC
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	5.5 / 0.14
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	24 / 26
<b>Tensile Strength (lbs/in. - N/100mm):</b>	16 / 277
<b>Elongation at Break:</b>	110%
<b>Temperature resistance:</b>	280°F (138°C) for 45 minutes
<b>Available Widths:</b>	3mm, 6mm
<b>Available Lengths:</b>	32.9m



**709**    

### FINE LINE TAPE

<b>Color:</b>	Yellow 
<b>Backing:</b>	PVC
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	5.5 / 0.14
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	22 / 24
<b>Tensile Strength (lbs/in. - N/100mm):</b>	17 / 294
<b>Elongation at Break:</b>	190%
<b>Temperature resistance:</b>	325°F (163°C) for 45 minutes
<b>Available Widths:</b>	3mm, 6mm
<b>Available Lengths:</b>	32.9m


## 316 TRIM MASK

- Perforated every 40mm for easy tear
- Linerless
- Easy lifting tab
- One size fits all



Protects rubber trims and bodyside mouldings during spraying. Perforated for easy tear off and flexible to follow contours and tight curves.

## PERFORATED TRIM MASKING TAPE

<b>Color:</b>	Green 
<b>Backing:</b>	Saturated Semi-Crepe Paper
<b>Adhesive:</b>	Natural Rubber and Cross Linked Resins
<b>Total Thickness (mils/mm):</b>	5.9 / 0.150
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	29 / 37
<b>Tensile Strength (lbs/in. - N/100mm):</b>	28 / 485
<b>Elongation at Break:</b>	9%
<b>Temperature resistance:</b>	250°F (121°C) for 60 minutes
<b>Available Widths:</b>	50mm
<b>Available Lengths:</b>	10m

NOTE: The technical specifications above are for the masking tape only



# DaVinci Line

## HIGH PERFORMANCE PAINTER'S MASKING TAPES

Made for **PROFESSIONAL PAINTERS**, these masking tapes offer **SHARPER PAINT LINES FOR EVERY PAINT JOB**. Feature **BETTER PAPER QUALITY** and unique **SATURATION** for exceptional **PERFORMANCE**. Specifically designed for **INSTANT ADHESION** and outstanding **SURFACE ADAPTABILITY** for **EASY APPLICATION** on **CURVED** and **IRREGULAR SURFACES**. Suitable for both **INTERIOR** and **EXTERIOR** applications.





- BESTSELLING PRO PAINTER'S TAPE
- 3 DAY INTERIOR
- Commercial / Residential Paint / Construction Grade

220 **3 DAYS**

### DaVinci CONTRACTOR

Color:	Ivory <input type="checkbox"/>
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.2 / 0.13
Adhesion to Steel (oz/in. - N/100mm):	23 / 25
Tensile Strength (lbs/in. - N/100mm):	22 / 385
Elongation at Break:	9%
Temperature resistance:	140°F (60°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



- HIGH GRADE PRO MASKING TAPE
- 5 DAY INTERIOR
- Commercial / Residential Paint / Construction Grade

226 **5 DAYS**

### DaVinci GREEN

Color:	Green <input checked="" type="checkbox"/>
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.3 / 0.135
Adhesion to Steel (oz/in. - N/100mm):	24 / 26
Tensile Strength (lbs/in. - N/100mm):	22 / 385
Elongation at Break:	9%
Temperature resistance:	176°F (80°C) for 30 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



- WHEN PERFORMANCE COUNTS ON HARD TO STICK SURFACES
- 10 DAY INTERIOR - 7 DAY EXTERIOR
- High temperature
- UV resistant

312 / 305 **10 DAYS**

### DaVinci PREMIUM

Color:	Ivory <input type="checkbox"/> Black <input checked="" type="checkbox"/>
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	5.7 / 0.145
Adhesion to Steel (oz/in. - N/100mm):	27 / 29
Tensile Strength (lbs/in. - N/100mm):	28 / 485
Elongation at Break:	9%
Temperature resistance:	176°F (80°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



- HIGH PERFORMANCE MASKING TAPE
- 15 DAY INTERIOR - 10 DAY EXTERIOR
- Designed to meet the most demanding applications
- High temperature
- UV resistant
- Waterproof

314

15 DAYS



### DaVinci BLUE

Color:	Blue <span style="color: blue;">■</span>
Backing:	Saturated Semi-Crepe Paper
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	6.1 / 0.155
Adhesion to Steel (oz/in. - N/100mm):	29 / 37
Tensile Strength (lbs/in. - N/100mm):	28 / 485
Elongation at Break:	9%
Temperature resistance:	248°F (120°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m



- WASHI RICE PAPER BEST IN CLASS PAINTER'S TAPE
- 60 DAY INTERIOR/EXTERIOR
- Firm hold but permits clean removal even after 60 days
- Easy removal from delicate interior surfaces without damaging finishes
- High temperature
- UV resistant
- Waterproof

319

60 DAYS



### DaVinci GOLD

Color:	Yellow <span style="color: yellow;">■</span>
Backing:	Saturated Washi Rice Paper
Adhesive:	Acrylic
Total Thickness (mils/mm):	3.46 / 0.09
Adhesion to Steel (oz/in. - N/100mm):	18 / 20
Tensile Strength (lbs/in. - N/100mm):	22 / 385
Elongation at Break:	5%
Temperature resistance:	302°F (150°C) for 60 minutes
Available Widths:	12mm, 18mm, 24mm, 36mm, 48mm, 72mm
Available Lengths:	55m

**Fun Fact:** Leonardo DaVinci could **write with one hand and draw with the other at the same time.**

# INDUSTRIAL AND SPECIALTY TAPES



This filament tape is reinforced with continuous glass yarn fiber filaments providing it with very high tensile strength. The biaxially oriented polypropylene backing provides excellent abrasion, moisture, splitting and scuffing resistance. It is solvent and thinner resistant, provides instant adhesion, possesses excellent quick stick properties to a wide variety of surfaces. Typical applications include; carton sealing, L-clip closures, strapping, bundling, unitizing, packaging and palletizing.



900



**MONO DIRECTIONAL GLASS REINFORCED FILAMENT TAPE**

<b>Color:</b>	Clear
<b>Backing (mils/mm):</b> Polypropylene	1 / 0.025
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Reinforcement:</b>	Fiberglass
<b>Total Thickness (mils/mm):</b>	4.5 / 0.115
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	90 / 98

<b>Tensile Strength (lbs/in. - N/100mm):</b>	110 / 1925
<b>Elongation at Break:</b>	6%
<b>Service Temperature - Min / Max:</b>	-22°F (-30°C) / 130°F (55°C)
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm
<b>Available Lengths:</b>	55m

910



**MONO DIRECTIONAL GLASS REINFORCED FILAMENT TAPE**

<b>Color:</b>	Clear
<b>Backing (mils/mm):</b> Polypropylene	1.1 / 0.028
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Reinforcement:</b>	Fiberglass
<b>Total Thickness (mils/mm):</b>	5.1 / 0.13
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	89 / 97

<b>Tensile Strength (lbs/in. - N/100mm):</b>	140 / 2450
<b>Elongation at Break:</b>	10%
<b>Service Temperature - Min / Max:</b>	-10°F (-23°C) / 150°F (66°C)
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm
<b>Available Lengths:</b>	55m



This filament tape is a fiberglass cross-weaved reinforced pressure sensitive tape that has been designed for applications where a high resistance to tensile stress is required. The biaxially oriented polypropylene backing provides excellent abrasion, moisture, splitting and scuffing resistance. It is solvent and thinner resistant, provides instant adhesion, possesses excellent quick stick properties to a wide variety of surfaces. Typical applications would include; heavy carton sealing, binding pipes, strapping, bundling, packaging and palletizing.



920




**CROSS DIRECTIONAL GLASS REINFORCED FILAMENT TAPE**

<b>Color:</b>	Clear
<b>Backing (mils/mm):</b> Polypropylene	1.1 / 0.028
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Reinforcement:</b>	Fiberglass
<b>Total Thickness (mils/mm):</b>	5.1 / 0.13
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	89 / 97

<b>Tensile Strength (lbs/in. - N/100mm):</b>	151 / 2645
<b>Elongation at Break:</b>	10%
<b>Service Temperature - Min / Max:</b>	-10°F (-23°C) / 150°F (66°C)
<b>Available Widths:</b>	12mm, 18mm, 24mm, 36mm, 48mm
<b>Available Lengths:</b>	55m



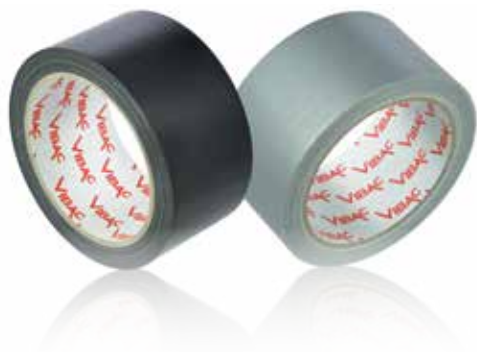

Our Duct Tapes are suitable for general repair applications, bundling, patching & mending. The polyethylene coated cloth provides outstanding moisture resistance and prolongs the tape's bond in humid and damp environments. The natural rubber pressure sensitive adhesive, solvent and thinner resistant, provides instant adhesion, possesses excellent quick stick properties and sticks to a wide variety of irregularly shaped surfaces such as metal, plastic, concrete and other surfaces. Tape tears easily by hand directly from the roll.

157



**UTILITY GRADE**

<b>Color:</b>	Silver <input type="checkbox"/> Black <input checked="" type="checkbox"/>
<b>Backing (mils/mm):</b>	Polyethylene Coated Cloth
<b>Adhesive:</b>	Natural Rubber
<b>Total Thickness (mils/mm):</b>	7.0 / 0.178
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	46/ 50

<b>Tensile Strength (lbs/in. - N/100mm):</b>	21 / 368
<b>Elongation at Break:</b>	16%
<b>Service Temperature - Min / Max:</b>	40°F (4°C) / 200°F (93°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths:</b>	55m

159



**SUPERIOR PERFORMANCE**

<b>Color:</b>	See chart above
<b>Backing (mils/mm):</b>	Polyethylene Coated Cloth
<b>Adhesive:</b>	Natural Rubber
<b>Total Thickness (mils/mm):</b>	9.0 / 0.229
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	50 / 55

<b>Tensile Strength (lbs/in. - N/100mm):</b>	24 / 420
<b>Elongation at Break:</b>	17%
<b>Service Temperature - Min / Max:</b>	40°F (4°C) / 200°F (93°C)
<b>Available Widths:</b>	48mm, 72mm
<b>Available Lengths:</b>	55m





Polyethylene pressure sensitive tape designed for sealing the refrigeration coil in the manufacturing process of freezer and refrigeration units.

This tape that guarantees an efficient isolation in order to avoid infiltration of polyurethane between the coil and the internal wall of the refrigeration unit.

1000



## REFRIGERATION TAPE

<b>Color:</b>	White <input type="checkbox"/>	<b>Tensile Strength (lbs/in. - N/100mm):</b>	8.4 / 142
<b>Backing (mils/mm):</b> Low Density Polyethylene	2.56 / 0.065	<b>Elongation at Break:</b>	400%
<b>Adhesive:</b>	Synthetic Rubber and Resins	<b>Available Widths:</b>	38mm, 50mm
<b>Total Thickness (mils/mm):</b>	3.62 / 0.092	<b>Available Lengths:</b>	200m, 600m
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	62.7 / 68.8		

# ENVIRONMENT :

AT VIBAC, PROTECTING THE ENVIRONMENT IS A TOP PRIORITY.



101 / 103 / 108



## STRAPPING TAPE

Color:	Silver <input type="checkbox"/> Black <input type="checkbox"/> Orange <input type="checkbox"/>
Backing:	Mono Oriented Polypropylene (MOPP)
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	2.67 / 0.068
Adhesion to Steel (oz/in. - N/100mm):	44.5 / 48.5
Tensile Strength (lbs/in. - N/100mm):	84 / 1455
Elongation at Break:	40%
Temperature resistance:	122°F (50°C) for 30 minutes
Available Widths:	12mm, 18mm, 24mm
Available Lengths:	55m, 110m



Our strapping tapes are made of a high thickness polypropylene and are designed for applications where high resistance to tensile stress, breakage and aging is required.

102 / 104



## STRAPPING TAPE

Color:	Light Blue <input checked="" type="checkbox"/> White <input type="checkbox"/>
Backing:	Mono Oriented Polypropylene (MOPP)
Adhesive:	Natural Rubber and Cross Linked Resins
Total Thickness (mils/mm):	4.3 / 0.110
Adhesion to Steel (oz/in. - N/100mm):	37 / 40
Tensile Strength (lbs/in. - N/100mm):	140 / 2450
Elongation at Break:	25%
Temperature resistance:	122°F (50°C) for 30 minutes
Available Widths:	12mm, 18mm, 24mm
Available Lengths:	55m, 110m

Strapping tapes are solvent and thinner resistant, provide instant adhesion, possess excellent quick stick properties and stick to a wide variety of irregularly shaped surfaces.



THE SOLVENT USED DURING THE COATING PROCESS IS RECYCLED AND RE-USED IN THE PRODUCTION PROCESS.

## GENERAL PURPOSE DOUBLE SIDED TAPES



The V-Bond range has been designed for various kinds of indoor applications where a high initial tack and a strong final peel adhesion are required. These tapes are characterized by a common synthetic rubber adhesive and various backing (BOPP, Cast PP, woven, non-woven and PET fabric). These double sided tapes are suitable for the bonding of small sized light object on different surfaces such as paper, cardboard, fabric and plastic.



### V-BOND 250



<b>Color:</b>	Transparent <input type="checkbox"/>
<b>Backing (Carrier):</b>	BOPP
<b>Liner:</b>	White
<b>Adhesive:</b>	Synthetic Rubber
<b>Total Thickness (mils/mm):</b>	3.54 / 0.090
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	89 / 97
<b>Tensile Strength (lbs/in. - N/100mm):</b>	22.4 / 388
<b>Elongation at Break:</b>	140%

- Transparent bi-oriented polypropylene double sided tape suitable for indoor applications.
- Ideal for bonding of fabrics, paper and plastic materials where high initial tack and strong peel adhesion are required.

### V-BOND 300



<b>Color:</b>	Transparent <input type="checkbox"/>
<b>Backing (Carrier):</b>	Cast Polypropylene
<b>Liner:</b>	White
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	4.33 / 0.11
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	89 / 97
<b>Tensile Strength (lbs/in. - N/100mm):</b>	11.2 / 194
<b>Elongation at Break:</b>	400%

- White cast polypropylene double sided tape suitable for indoor applications.
- Ideal for bonding of fabrics, paper and plastic materials where high initial tack and strong peel adhesion are required.
- Suitable for carpet bonding.

### V-BOND 416



<b>Color:</b>	Transparent <input type="checkbox"/>
<b>Backing (Carrier):</b>	Non-Woven Tissue
<b>Liner:</b>	White
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	3.94 / 0.1
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	107 / 117
<b>Tensile Strength (lbs/in. - N/100mm):</b>	5.6 / 97
<b>Elongation at Break:</b>	5%

- Translucent non-woven double sided tape suitable for indoor applications.
- Ideal for bonding of fabrics, paper and plastic materials where high initial tack and strong peel adhesion are required.
- Hand tearable.
- Suitable for carpet bonding.

### V-BOND 710



<b>Color:</b>	Transparent <input type="checkbox"/>
<b>Backing (Carrier):</b>	Polyester Fabric
<b>Liner:</b>	White
<b>Adhesive:</b>	Synthetic Rubber and Resins
<b>Total Thickness (mils/mm):</b>	9.84 / 0.25
<b>Adhesion to Steel (oz/in. - N/100mm):</b>	135 / 146
<b>Tensile Strength (lbs/in. - N/100mm):</b>	17 / 291
<b>Elongation at Break:</b>	<35%

- White polyester fabric double sided tape suitable for indoor applications.
- Ideal for bonding of fabrics, paper and plastic materials where high initial tack and strong peel adhesion are required
- Suitable for carpet bonding.



# PACKAGING

Vibac delivers its adhesive tapes according to the traditional packaging standards:

- Individually Wrapped
- 6 Rolls Flat Pack
- Accordion
- Jumbo

In Plain, Vibac or personalized cores and boxes in both Hand Rolls and Machine Rolls.



# PERSONALIZATION (PRIVATE LABEL)


Vibac can customize products, brand names and images according to the specific needs of their customers and the market. Vibac can offer a wide range of variables, such as:

- Single packaging
- Packaging with personalized external label and/or bar code, core or box.
- Personalized Surface and Reverse Print




# DISPENSERS

A retractable cutting blade

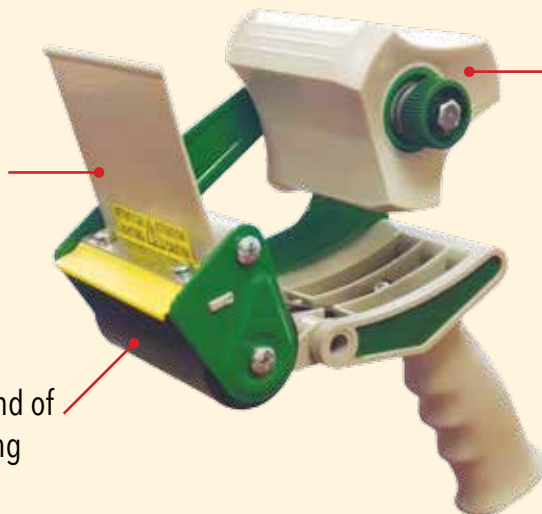

A device that prevents the end of the adhesive tape from falling

A roll holder with clutch which is suitable for all types of adhesive tape








**VIBAC<sup>®</sup>**  
GROUP  
**ADHERING TO EXCELLENCE**



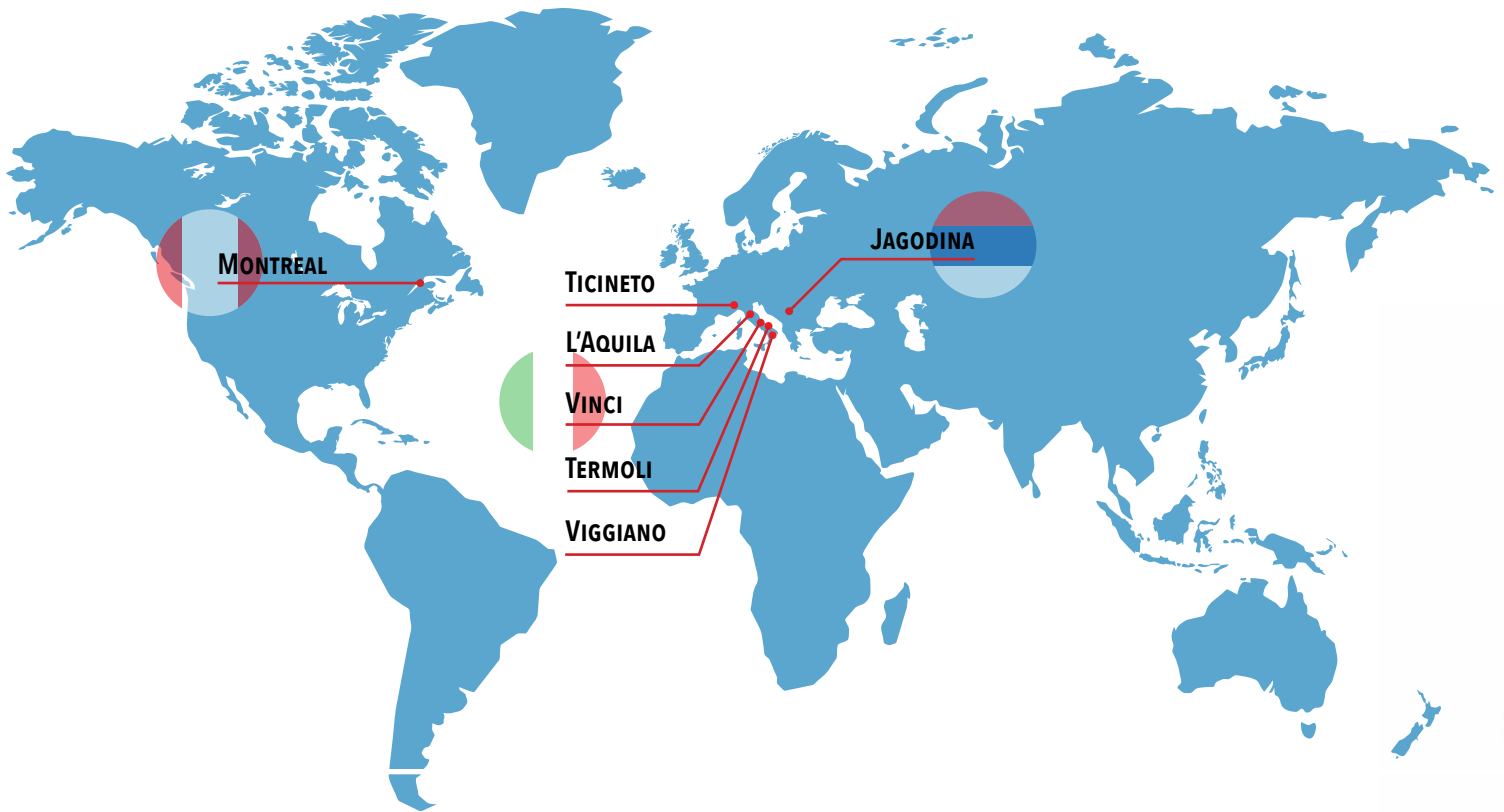

**The VIBAC Group** is a multinational enterprise and one of the world's leading companies in the Pressure Sensitive Adhesive Tapes and specialty Packaging Films industry.

We are present around the world with 6 operative plants in Europe and North America, serving customers in over 130 countries. We are proud to achieve sustainable and durable corporate growth through the application of cutting-edge manufacturing technologies with the strictest environmental regulations.

**The VIBAC Group** is building a culture that gives Customer Satisfaction the highest consideration and priority.

---

## **VIBAC GROUP NORTH AMERICA**

12 250 Industriel Blvd, Montreal, Quebec, Canada H1B 5M5

Toll Free: (800) 557-0192 | Phone: (514) 640-0250 | Fax: (514) 640-6702

e-mail: [sales@vibac.com](mailto:sales@vibac.com)

[www.vibac.com](http://www.vibac.com)